

12-27-99

Attorney Docket No. 2271/53999-A

Total Pages 3

Express Mail Label No. EM157609587US

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) are the specification and claims of the nonprovisional patent application of:

Yasutaka TSUKAMOTO and Hidetaka MINAMI

for

Inventors

RECORDING MEDIA INCLUDING CODE FOR ESTIMATING POWER CONSUMPTION

Title of Invention

APPLICATION ELEMENTS ENCLOSED:

1. ☒ Specification (total pages 30) including:
 - a. 13 pages of claims (39 claims)
 - b. 1 page Abstract
2. ☒ 8 sheets of ☒ informal formal drawings (Figs. 1-11)
3. Oath or declaration of Applicant(s) (total pages)
 - a. Newly executed (original or copy)
 - b. Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Item 14 completed)
4. Deletion of Inventor(s)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
5. Incorporation By Reference
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied in item 3b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)

APPLICATION PARTS ENCLOSED:

7. An assignment of the invention to Ricoh Company, Ltd. (cover sheet & document(s))
8. 37 CFR 3.73(b) Statement (when there is an assignee)
9. Power of Attorney
 - a. Newly executed (original or copy)
 - b. Copy from a prior application

12/22/99
JC688 U.S. PTOJC678 U.S. PTO
09/469754
12/22/99

09/469754

10. ___ Information Disclosure Statement (IDS)/PTO-1449
___ Copies of IDS Citations
11. ___ A Preliminary Amendment
12. X Return Receipt Postcard (MPEP 503)
13. ___ A small entity statement under 37 C.F.R. §1.9 and §1.27
___ Statement filed in prior application, status still proper and desired
14. X If a Continuing Application, *check the appropriate box and supply the requisite information:*
- ☐ Continuation of prior application No.: _____ filed _____
- ☐ Divisional of prior application No.: _____ filed _____
- ☒ Continuation-in-part (CIP) of prior application No.: 08/879,696 filed June 19, 1997
15. ___ Amend the specification by inserting before the first line of page one: --This is a ___ continuation-in-part of application Serial No. _____ filed _____--
16. X Priority of application No. 8-159543 filed in Japan on June 20, 1996. Applicant hereby claims priority under 35 U.S.C. § 119.
___ A certified copy of priority application No. _____ is enclosed
X A certified copy of priority application No. 8-159543 has been filed in prior application S.N. 08/879,696 filed June 19, 1997
17. ___ Other (identify) _____

The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT

					Rate			Fee	
	Number Filed		Number Extra*		Small Entity	Other Entity		Small Entity	Other Entity
Total Claims	39-20	=	19	x	\$ 9	\$ 18	=	\$	\$ 342
Indep. Claims	9-3	=	6	x	\$ 39	\$ 78	=	\$	\$ 468
Multiple Dependent Claims Presented: Yes ___ No <u>X</u>					\$130	\$260	=	\$	\$ 0
If the difference in column 1 is less than zero, enter "0" in column 2					Basic Fee			\$ 380	\$ 760
					Total Fee				\$ 1,570

18. X A check in the amount of \$ 1,570.00 to cover the filing fee.
19. Please charge Deposit Account No. 03-3125 in the amount of \$ 40.00 for recordation of the Assignment.
20. X The Commissioner is hereby authorized to charge any additional fees which may be required in connection with the following or credit any overpayment to Deposit Account No. 03-3125.
- X Filing fees under 37 C.F.R. § 1.16.
- X Patent application processing fees under 37 C.F.R. §1.17.
- The issue fee set in 37 C.F.R. §1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. §1.311(b).
21. X Three copies of this sheet are enclosed.
22. X Other (identify) Cover Page

CORRESPONDENCE ADDRESS:

RICHARD F. JAWORSKI
Registration No. 33,515
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
United States of Americas
Tel.: (212) 278-0400
Fax: (212) 391-0525

Respectfully submitted,



RICHARD F. JAWORSKI, Reg. No. 33,515
Attorney for Applicants
c/o Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
Tel.: (212) 278-0400

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of : Yasutaka TSUKAMOTO et al.
Serial No. : Not Yet Assigned Group Art Unit:
Date Filed : Concurrently Herewith Examiner:
For : RECORDING MEDIA INCLUDING CODE FOR ESTIMATING
POWER CONSUMPTION

1185 Avenue of the Americas
New York, N.Y. 10036


Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

EXPRESS MAIL
LETTER OF TRANSMITTAL

Express Mail mailing label number: EM157609587US

Date of Deposit: December 22, 1999

I hereby certify that the above-identified application consisting of a 30-page specification, 39 claims, 8 sheets of informal drawings, 3 copies of transmittal form, and check for \$1,570 filing fee, Information Disclosure Statement, Form PTO-1449 is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.


Mail Room Employee
Depositing Express Mail Material

Attorney for Applicant:

IVAN S. KAVRUKOV, Reg. No. 25,161
Cooper & Dunham LLP
Tel: (212) 278-0400

***Application
for
United States Letters Patent***

To all whom it may concern:

Be it known that,

Yasutaka TSUKAMOTO and Hidetaka MINAMI

have invented certain new and useful improvements in

RECORDING MEDIA INCLUDING CODE FOR ESTIMATING POWER CONSUMPTION

of which the following is a full, clear and exact description:

**RECORDING MEDIA INCLUDING CODE FOR
ESTIMATING IC POWER CONSUMPTION**CROSS-REFERENCE TO RELATED APPLICATIONS

This is a continuation-in-part of application Serial No. 08/879,696 filed June 19, 1997, the entire contents of which are herein incorporated by reference.

BACKGROUNDField of the Invention

This invention relates to computer readable recording media including computer executable code and a programmed processor for estimating electric power consumption by integrated circuits which are comprised of basic cells and mega cells.

Description of the Related Art

As circuit components and systems thereof become exceedingly more complex, it is necessary to estimate power consumption by circuit components and integrated circuits with the highest possible accuracy. Several methods have heretofore been developed for estimating electric power consumed by integrated circuits and circuit components at the stage of circuit designing.

One conventional method is described in Japanese Laid-Open Patent Application 2-136775 which discloses a method that: (a) obtains numbers of operation events at terminals or pins of each basic cell from the results of logic simulations; and (b) estimates power consumption based on the number of events obtained and pre-

established data of electric power consumption by each basic cell. Using this information the power consumed by an integrated circuit is estimated.

Another conventional method for power estimation of an integrated circuit is carried out by obtaining information on each basic cell: (a) changes in output voltage signals with time; (b) program instructions for the operation modes; and © power consumption by the basic cells. Using this information the power consumed by an integrated circuit is estimated. Such a method is described in Japanese Laid-Open Patent Application 4-130661.

The above-mentioned conventional methods estimate power consumed by basic cells, but are insufficient to accurately estimate power consumption for integrated circuits including mega cells.

Therefore, it would be desirable to provide a method and an apparatus for estimating electric power consumed by integrated circuits and/or a circuit system which includes mega cells as well as basic cells.

SUMMARY OF THE INVENTION

A computer readable medium includes computer executable code stored thereon, the code for estimating power consumption of an integrated circuit, comprising code for simulating logic of basic and mega cells of the integrated circuit, code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to

calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells based on said logic simulations and pre-established power consumption data, code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells based on the logic simulations and pre-established power consumption data and code for combining the first and second values to obtain the power consumption of the integrated circuit.

According to another embodiment, a computer readable medium includes computer executable code stored there, the code for estimating electric power consumed by basic cells and mega cells of an integrated circuit to estimate total power consumed by the integrated circuit, comprising code for simulating logic of the basic cells and the mega cells, wherein each function of each mega cell for logic simulation is defined by hardware description language, code for estimating a current consumed by the basic cells for estimating a first value of electric power consumed by the basic cells based on logic simulation results from the logic simulations and pre-established power consumption data for each logic state of each input and output terminal of the basic cells, code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate the current consumed by the mega cells for estimating a second value of electric power consumed by the mega cells based on logic simulation results from the logic simulations and pre-established power consumption data for the logic states, variables in the function description, and the operating frequencies at each input and output terminal of each mega cell and code for adding the first and the second

values of the power consumption to determine the total power consumption for the integrated circuit.

According to another embodiment, a computer readable medium includes computer executable code stored thereon, the code for estimating power consumption of an integrated circuit, comprising code for compiling a table which tabulates data of electric power consumed by mega cells of the integrated circuit during operation, code for simulating logic of the mega cells and basic cells of the integrated circuit, wherein data from the table is used when simulating logic of the mega cells, code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate the current consumed by the mega cells for estimating a first value of electric power consumed by the mega cells based on results from the logic simulations, code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by the basic cells based on logic simulation results from the simulations and pre-established power consumption data for each logic state at each input and output terminal of the basic cells and code for adding the first and the second values to obtain the power consumption of the integrated circuit.

The computer readable medium may a floppy disk such as a 3.5 inch diskette, a compact disk such as a read-only CD or a read/write CD. The computer readable medium may also be a DVD. The computer executable code may be in compressed or noncompressed form.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are described hereinbelow with reference to the drawings wherein:

FIG. 1 is a functional block diagram of a system for estimating electric power consumption by basic cells and mega cells in accordance with one embodiment of the present application;

FIG. 2 is a block diagram of a computing system having a CPU and memory that includes the power consumption estimating system of FIG. 1;

FIG. 3 is a schematic representation of a mega cell;

FIG. 4 is a table for storing data representing power consumed for various functions performed by the mega cell of FIG.3;

FIG. 5 is another table for storing current consumption data for various states of the mega cell of FIG.3;

FIG. 6 is a timing diagram which illustrates the change of logic variables at input or output terminals of the mega cell of FIG.3;

FIG. 7 is a flow chart which illustrates a sequence for determining the power consumed by an integrated circuit according to one embodiment of the present application;

FIG. 8 is a functional block diagram of a system for estimating electric power consumption of integrated circuits in accordance with a another embodiment of the present application;

FIG. 9 is a flow chart which illustrates a sequence for determining the power consumed by an integrated circuit according to another embodiment of the present application;

FIG. 10 is a table for storing power consumption data associated with the method of FIG. 8; and

FIG. 11 is an exemplary pseudo code representation providing instructions executed by a mega cell and used in conjunction with FIG. 10.

DETAILED DESCRIPTION

Referring to FIGS. 1 and 2, the computing system includes CPU 11, memory 12 (e.g., RAM and/or ROM), hard disk 13, display 14 and keyboard 15. The computing system may also include an internal or external storage medium reader/writer 16 for reading data from and/or writing data to removable storage media 16a. Various types of removable storage media include, but are not limited to, floppy disks (e.g., 5.25in., 3.5in disks), CDs including read only or read/write CDs, DVD, etc.. As described herein, removable storage media 16a may also be considered as representing a server such as, for example, an Internet server. Reader/writer 16 may then be considered as representing an Internet access system for accessing and downloading data, software, etc. therefrom. The system may include compression/decompression circuitry or functions for compressing data or software stored to the media and for decompressing compressed data or software read from the media. The hard disk 13 stores a circuit connection list 1 and a logic simulation library 2, and also functions as a basic cell current data storage unit 4 and a mega cell current data storage unit 6. In the alternative, the circuit connection list 1 and the logic simulation library 2, as well as the basic cell current data storage unit 4 and the mega cell current data storage unit 6 can be stored on one or more removable storage media 16a and input via the internal or external storage

media reader/writer 16. The CPU 11 together with programs stored in the memory 12 functions as a logic simulation unit 3, estimation units 7 and 8 and an addition unit 9, seen in FIG. 1. Computer executable code or software programs for performing the methods and functions (including the functions of logic simulation unit 3, estimation units 7, 8 and addition unit 9) described herein can be stored on one or more removable storage media 16a and can be executed from the storage media or downloaded into memory 12 for execution by CPU 11. The estimation unit 7 estimates current consumption by the basic cells Ia, and estimation unit 8 estimates current consumption by the mega cells Ib.

In the basic cell current data storage unit 4, there is stored current consumption data previously established for each logic state of each basic cell at each terminal (e.g., input and output terminal). The mega cell current data storage unit 6 stores current consumption data previously established for each logic state, each variable in the function description, and the operating frequency for each state of each mega cell at each terminal (e.g., input and output terminal).

In the circuit connection list 1, seen in FIG. 1, there is stored circuit connection information for the basic and mega cells of an integrated circuit for which an estimate of power consumption by the circuit is being obtained. For the mega cells, functions, e.g., operational states, are described with the hardware description language that is also included in the list 1.

The logic simulation library 2 stores simulation data for each basic and mega cell whose operation is simulated. Circuit connection data from the circuit connection list 1 and simulation data stored in the logic simulation library 2 for each basic and

mega cell in the integrated circuit being simulated are transferred to the logic simulation unit 3 and the logic simulation unit simulates operation of the integrated circuit design. The results of the simulation are stored in a logic simulation result memory 5.

Continuing to refer to FIGS. 1 and 2, the estimation unit 7 estimates the current consumed by the basic cells Ia, which is a portion of the total of current consumed by the integrated circuit. For example, the estimate of the current Ia may be based on: (a) the simulation results; and (b) the data previously stored in the basic cell current data storage unit 4. The estimated current consumed by the basic cells Ia can be expressed by the following equation:

$$Ia_{tot} = Ia_1 + Ia_2 + \dots + Ia_n$$

where Ia is the current consumed by each of 1 thru n basic cells.

The mega cell estimation unit 8 estimates the current consumed by the mega cells Ib, which is a portion of the total current consumed by the integrated circuit. For example, the estimated current consumed by the mega cells Ib may be based on: (a) the simulation results; and (b) the data previously stored in the mega cell current data storage unit 6. The current Ib can be expressed by the following equation:

$$Ib_{tot} = Ib_1 + Ib_2 + \dots + Ib_m$$

where Ib is the current consumed by each of 1 thru m mega cells.

The addition unit 9 combines the estimated current consumed by the basic cells Ia_{tot} and the estimated current consumed by the mega cells Ib_{tot} to obtain the total current consumed by the integrated circuit.

A method for estimating the current consumed by the mega cells Ib is detailed below. Initially, the logic states for each mega cell are obtained. Once the logic states

are obtained, the average operation frequency f for each state is determined. For synchronous type mega cells, the average operation frequency f for a state is determined by counting the number of clock pulses P for the time period t_{state} that the cell is in a particular state and dividing P by that time period. Thus, the average operation frequency f for synchronous type mega cells can be expressed as:

$$f = P/t_{state}$$

Asynchronous type mega cells are operated by various pulses, e.g., trigger pulses originating from other parts of a system. Thus, the average operation frequency f for each state depends on the particular pulse triggering the cell.

The AC component of consumed current I_{AC} and the DC component of consumed current I_{DC} for each state are then determined using known techniques and the average current consumed by the mega cell I_{MC} can be expressed as:

$$I_{MC} = I_{comp}/T$$

where $I_{comp} = I_{AC} + I_{DC}$ (i.e., the sum of each component of consumed current for each state time period t_{state} , and T is the time period for the mega cell operation.

The above calculations for current consumption are carried out for each mega cell included in the integrated circuit. Subsequently, by adding the values of the current consumption obtained above for the mega cells and the basic cells, the total current consumed by an integrated circuit can be accurately estimated.

Referring now to FIG. 3 a schematic representation of a mega cell identified as "BOX" is shown. This mega cell has input terminals A0, A1, CEB, WEB, and CK and output terminal D0. This mega cell is specifically characterized as a RAM of the synchronous type, which is driven by clock signal CK and has logic states, such as

“standby”, “read”, or “write”. Current data for this mega cell is stored in the mega cell current data storage unit 6, preferably in the form of a table. The table in FIG. 4 stores cell data, such as the name, type (synchronous or asynchronous), frequency signal, and a state list of the mega cell.

The above-mentioned clock signal is one to which the operation frequency of the mega cell is referred. The clock signal may also be expressed by an internal variable, as well as the external terminal of the mega cell. As seen in FIG. 4, the exemplary mega cell BOX has a plurality of states which consume different amounts of current.

The table of FIG. 5 stores cell data such as data representing: (a) conditions for determining the cell states, e.g., standby, read, or write; and (b) AC and DC current consumption components for each state of the mega cell. The AC and DC current consumption components can be expressed by the equations, seen in FIG. 5, for each state. The variables, such as CEB or WEB, for example, may also be expressed by an internal variable as well as the external terminals of the mega cell. Thus, in the exemplary table of FIG. 5, if CEB = 1 (high), the mega cell is in the standby state.

The AC current component of the exemplary table of FIG. 5 represents the component of the current consumed by the mega cell which varies with an operation frequency f of each state. For the exemplary table of FIG. 5, the AC current component is linearly dependent on the operation frequency f of the particular state, where the AC current is zero in the standby state, $X \times f$ in the read state, and $Y \times f$ shown in FIG. 5. However, the dependence of the current is not limited to the above equations, and may also be expressed by other forms such as, for example, equations with more complex

forms in terms of the frequency or data given as a table.

The DC current component represents the component of the current which does not vary with the operation frequency (f). In the table of FIG. 5, the DC current component has a value S when in the standby state, a value Z when $D0$ becomes 1 (high) in the read state, and the DC current is zero when in the write state. A value for the current flow Z is obtained from previous measurements.

The timing diagram of FIG. 6 illustrates changes in logic variables at each of the input and output terminals of the mega cell BOX. These changes in the logic variables are obtained from the logic simulation of the cell and can be output from the simulation result memory 5 to the mega cell estimation unit 8.

As an illustration, FIG. 7 is a flow chart illustrating a sequence for estimating electric power consumption of an integrated circuit for the mega cell of FIGS. 3-6. Initially, the states of the mega cell of FIG. 3 are specified with time by referring to the results of the logic simulation (step 1). As seen in FIG. 6, the logic simulation results indicate that the mega cell is in the read state from time t_0 to t_1 , since CEB is 0 (low) and WEB is 1 (high) for this period, and in the standby state during t_1 to t_2 , since CEB is 1 (high).

The average operation frequency f for each state is then obtained. The table of FIG. 4 indicates that the frequency signal of the mega cell, which is a synchronous type cell, is determined by from the clock signal CK . As seen in FIG. 6, the clock signal CK has 4 pulses during the read state from t_0 to t_1 . From the number of the pulses ($P=4$) and the time length ($t_{state} = t_1 - t_0$) the average operation frequency is calculated using the following equation (step 2):

$$f = 4/(t_1 - t_0)$$

Subsequently, the AC and DC current consumption components for each state identified in the table of FIG. 4 are calculated (step 3). In the read state the AC current consumption component I_{ra} can be expressed as:

$$I_{ra} = X \times f$$

where X is a constant pre-established by experiment or measurement, and the DC current consumption component I_{rd} can be expressed as:

$$I_{rd} = Z(W_1 + W_2)/(t_1 - t_0)$$

where Z is a constant pre-established by experiment or measurement, and W_1 and W_2 are time fractions for. When $D0$ is logic 1 (high) I_{rd} is Z for the time period for which $D0$ is high.

When the cell is in the standby state from t_1 to t_2 , the DC current consumption component in the standby state I_{sd} can be expressed as:

$$I_{sd} = S$$

where S is a constant pre-established by experiment or measurement.

The average current consumed by the mega cell I_{MC} during time t_0 to t_2 is calculated using the following equation (step 4):

$$I_{MC} = I_{comp} / T$$

$$I_{MC} = (I_{ra}(t_1 - t_0) + I_{rd}(t_1 - t_0) + I_{sd}(t_2 - t_1))/(t_2 - t_0)$$

Referring to FIG. 8 a functional block diagram of a system for estimating electric power consumption of integrated circuits in accordance with a second embodiment of the present application is shown. In this embodiment, the power

consumption estimating system includes logic simulation unit 21 for carrying out logic simulations and a power consumption analyzing unit 22 for estimating power consumption by mega cells. A power consumption addition unit 23 is provided to calculate the total power consumption by an integrated circuit. Circuit data (e.g., functional description data for each mega cell) used to perform logic simulations for each mega cell are stored in circuit data storage unit 30. A test pattern data storage unit 31 stores test pattern information for logic simulations, and a power consumption table 32 stores power consumption data for each mega cell for each operation instruction.

In addition, the power consumption analyzing unit 22 is provided with an instruction input unit 25 which inputs instructions given to mega cells during logic simulations, an instruction memory 26 for storing inputted instructions, a power consumption table referring unit 27 for outputting power consumption values from the power consumption table 32, a mega cell power consumption addition unit 28 for adding power consumption values of each mega cell, and a power consumption memory 29 for storing power consumption values obtained.

FIG. 9 is a flow chart illustrating a sequence for estimating electric power consumption of an integrated circuit in accordance with a second embodiment of the application. The method according to this embodiment will be discussed with reference to FIGS. 8 and 9. The logic simulation unit 21 inputs test patterns (step 11) for mega cells for which each function of the cells is described by the hardware description language, and carries out logic simulations (step 12). If the mega cell fetches an instruction during the logic simulations, the instruction input unit 25 in the power consumption analyzing unit 22 inputs the above-mentioned instruction. In the mega

cell, appropriate functions are previously described for the mega cell to deliver a message to the instruction input unit 25 upon fetching the instruction. Examples of such functions will be discussed below.

Subsequently, the instruction memory 26 stores the message and the consumption power table referring unit 27 refers data of power consumption 32 (step 14). The table 32 has previously been constructed with power consumption data for the mega cells corresponding to each program instruction as illustrated in FIG 10.

The consumption power table referring unit 27 then outputs power consumption values from the power consumption table 32 (step 15). The mega cell power consumption addition unit 28 then combines the power consumption values of each mega cells outputted from the above-mentioned table 32 (step 16), and the results are stored in the power consumption memory 29.

Subsequently, it is determined whether a logic simulation for each mega cells has been performed (step 17). If a simulation for each mega cell has not been performed, the simulation process proceeds to step 12 to begin simulation of another mega cell. If a simulation for each mega cell has been performed, then power consumption values for other cells, e.g., basic cells, are added to the power consumption values for the mega cells by the power consumption addition unit 23 so that the power consumption for the entire integrated circuit is obtained (step 18) and displayed on the display 14 (step 19).

Referring now to FIG. 11, a pseudo code representation providing program instructions for a mega cell, such as a CPU or DSP, is shown. When an instruction LDA is fetched by, for example, a CPU during logic simulations, the instruction input

unit 25 inputs an instruction by a function \$PowerAnalysis and the instruction memory 26 then stores the message LDA. The function \$PowerAnalysis is described so as to be always outputted when the instruction is fetched by the mega cell and also acts to transfer the fetched message to the instruction input unit 25. The power consumption table referring unit 27 outputs a power consumption value Wa (FIG. 10) stored in the power consumption table 32 corresponding to the instruction LDA. The value Wa is then stored in the power consumption memory 29.

In a similar manner, when an instruction STA is fetched by, for example, a CPU or DSP during logic simulation, the instruction input unit 25 inputs the instruction STA by another function \$PowerAnalysis. The instruction STA is subsequently stored in the instruction memory 26. The power consumption power table referring unit 27 then outputs a power consumption values (Wb) previously stored in the table 32 corresponding to the instruction STA (FIG. 10). The value Wb is then stored in the power consumption memory 29.

The simulation processes such as described above are repeated until the logic simulations are completed for all mega cells. When the simulations are completed, power consumption values for the mega cells and cells other than the mega cells, (e.g., basic cells) are added by the power consumption addition unit 23 to obtain the power consumption value for the integrated circuit, which is then displayed on the display 14.

By the method and apparatus of the present application, more accurate estimations of the power consumption of integrated circuits can be obtained. The methods according to the present application provide power consumption estimates prior to manufacturing which is useful for manufacturing more efficient integrated

circuits at lower cost.

Each of the above-mentioned methods and functions can be readily implemented using one or more conventional general purpose digital computers and/or servers programmed according to the teachings of the present specification, as will be
5 apparent to those skilled in the computer art. Appropriate software coding can be readily prepared by skilled programmers based on the teachings of the present disclosure, as will be apparent to those skilled in the programming arts. The present invention may also be implemented by the preparation of application specific integrated circuits or by interconnecting an appropriate network of conventional component parts, as will be readily apparent to those skilled in the art.

Additional modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

WHAT IS CLAIMED IS:

1. A computer readable medium including computer executable code stored thereon,
the code for estimating power consumption of an integrated circuit, comprising:

code for simulating logic of basic and mega cells of the integrated circuit;

5 code for estimating a current consumed by the mega cells by obtaining logic
states for each mega cell, determining an average operation frequency for each logic
state, and determining an alternating current component and a direct current component
for each logic state to calculate said current consumed by the mega cells for estimating a
first value of electric power consumed by said mega cells based on said logic
simulations and pre-established power consumption data;

10 code for estimating a current consumed by the basic cells for estimating a
second value of electric power consumed by said basic cells based on said logic
simulations and pre-established power consumption data; and

15 code for combining said first and second values to obtain the power
consumption of the integrated circuit.

2. A computer readable medium as recited in claim 1, wherein the computer
readable medium comprises a floppy disk.

3. A computer readable medium as recited in claim 2, wherein the floppy disk
comprises a 3.5 inch diskette.

4. A computer readable medium as recited in claim 1, wherein the computer readable medium comprises a compact disk

5. A computer readable medium as recited in claim 4, wherein the compact disk is a read-only disk.

6. A computer readable medium as recited in claim 4, wherein the compact disk is a read/write disk.

7. A computer readable medium as recited in claim 1, wherein the computer readable medium comprises a DVD.

8. A computer readable medium as recited in claim 1, wherein the computer executable code is one of compressed and noncompressed.

9. A computer readable medium including computer executable code stored there, the code for estimating electric power consumed by basic cells and mega cells of an integrated circuit to estimate total power consumed by the integrated circuit, comprising:

code for simulating logic of said basic cells and said mega cells, wherein each function of each mega cell for logic simulation is defined by hardware description language;

code for estimating a current consumed by the basic cells for estimating a first

value of electric power consumed by said basic cells based on logic simulation results from said logic simulations and pre-established power consumption data for each logic state of each input and output terminal of said basic cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a second value of electric power consumed by said mega cells based on logic simulation results from said logic simulations and pre-established power consumption data for said logic states, variables in the function description, and said operating frequencies at each input and output terminal of each mega cell; and

code for adding said first and said second values of the power consumption to determine the total power consumption for the integrated circuit.

10. A computer readable medium as recited in claim 9, wherein the computer readable medium comprises a floppy disk.

11. A computer readable medium as recited in claim 10, wherein the floppy disk comprises a 3.5 inch diskette.

12. A computer readable medium as recited in claim 9, wherein the computer readable medium comprises a compact disk

13. A computer readable medium as recited in claim 12, wherein the compact disk is a read-only disk.

14. A computer readable medium as recited in claim 12, wherein the compact disk is a read/write disk.

15. A computer readable medium as recited in claim 9, wherein the computer readable medium comprises a DVD.

16. A computer readable medium as recited in claim 9, wherein the computer executable code is one of compressed and noncompressed.

17. A computer readable medium including computer executable code stored thereon, the code for estimating power consumption of an integrated circuit, comprising:

code for compiling a table which tabulates data of electric power consumed by mega cells of the integrated circuit during operation;

code for simulating logic of said mega cells and basic cells of the integrated circuit, wherein data from said table is used when simulating logic of said mega cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells based on results from said

logic simulations;

code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells based on logic simulation results from said simulations and pre-established power consumption data for each logic state at each input and output terminal of said basic cells; and

code for adding said first and said second values to obtain the power consumption of the integrated circuit.

18. A computer readable medium as recited in claim 17, wherein the computer readable medium comprises a floppy disk.

19. A computer readable medium as recited in claim 18, wherein the floppy disk comprises a 3.5 inch diskette.

20. A computer readable medium as recited in claim 17, wherein the computer readable medium comprises a compact disk

21. A computer readable medium as recited in claim 20, wherein the compact disk is a read-only disk.

22. A computer readable medium as recited in claim 20, wherein the compact disk is a read/write disk.

23. A computer readable medium as recited in claim 17, wherein the computer readable medium comprises a DVD.

24. A computer readable medium as recited in claim 17, wherein the computer executable code is one of compressed and noncompressed.

25. A programmable computer for estimating power consumption of an integrated circuit comprising:

processor for executing computer executable code;

storage media for storing the computer executable code executed by the processor, the computer executable code including:

code for carrying out logic simulations of circuit data for basic cells and mega cells of the integrated circuit;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells based on the results of said logic simulations and pre-established power consumption data;

code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells based on the results of said logic simulations and pre-established power consumption data; and

code for combining said first and second values of electric power consumed by

said mega and basic cells so as to obtain the power consumption of the integrated circuit.

26. A programmable computer as recited in claim 25, further comprising a read/write unit in which a computer readable media including computer executable code can be input, the computer executable code being downloaded from the computer readable media to the storage media via the read/write unit for execution by the processor.

27. A programmable computer as recited in claim 26, wherein the computer executable code is stored on the computer readable media in compressed format and is decompressed and downloaded to the storage media.

28. A programmable computer as recited in claim 26, wherein the computer readable media comprises at least one of a floppy disk, a CD, DVD and an Internet server.

29. A programmable computer for estimating power consumption of an integrated circuit, comprising:

processor for executing computer executable code;

storage media for storing the computer executable code executed by the processor, the computer executable code including:

code for carrying out logic simulations of circuit data for basic cells and mega cells of the integrated circuit;

code for estimating a current consumed by the basic cells for estimating a first value of electric power consumed by said basic cells, said estimate being based on logic simulation results obtained by said simulation means and pre-established power consumption data for each logic state at each input and output terminal of said basic cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a second value of electric power consumed by said mega cells, said estimate being based on logic simulation results obtained by said simulation means and pre-established power consumption data for each logic state, variables in a function description, and said operating frequencies of said mega cells at each input and output terminal; and

code for adding said first and second values of power consumed by said basic and mega cells so as to obtain the power consumption of the integrated circuit.

30. A programmable computer as recited in claim 29, further comprising a read/write unit in which a computer readable media including computer executable code can be input, the computer executable code being downloaded from the computer readable media to the storage media via the read/write unit for execution by the processor.

31. A programmable computer as recited in claim 30, wherein the computer executable code is stored on the computer readable media in compressed format and is decompressed and downloaded to the storage media.

32. A programmable computer as recited in claim 30, wherein the computer readable media comprises at least one of a floppy disk, a CD, DVD and an Internet server.

33. A programmable computer for estimating power consumption of an integrated circuit comprising:

processor for executing computer executable code;

storage media for storing the computer executable code executed by the processor, the computer executable code including:

a table which tabulates data of electric power consumed by mega cells of the integrated circuit during operation;

code for carrying out logic simulations of circuit data for basic cells of the integrated circuit and said mega cells, wherein data from said table is used when simulating logic of said mega cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells, said estimate being based on

logic simulation results from said simulation means;

code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells, said estimate being based on logic simulation results obtained by said simulation means and pre-established power consumption data for logic states for each input and output terminal of said basic cells; and

code for adding said first and second values of the power consumed by said mega and basic cells so as to obtain the power consumption of the integrated circuit.

34. A programmable computer as recited in claim 33, further comprising a read/write unit in which a computer readable media including computer executable code can be input, the computer executable code being downloaded from the computer readable media to the storage media via the read/write unit for execution by the processor.

35. A programmable computer as recited in claim 34, wherein the computer executable code is stored on the computer readable media in compressed format and is decompressed and downloaded to the storage media.

36. A programmable computer as recited in claim 34, wherein the computer readable media comprises at least one of a floppy disk, a CD, DVD and an Internet server.

37. A programmed computer for estimating power consumption of an integrated circuit, the programmed computer programmed with code comprising:

code for simulating logic of basic and mega cells of the integrated circuit;

code for estimating a current consumed by the mega cells by obtaining logic

5 states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells based on said logic

simulations and pre-established power consumption data;

code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells based on said logic simulations and pre-established power consumption data; and

code for combining said first and second values to obtain the power consumption of the integrated circuit.

38. A programmed computer for estimating electric power consumed by basic cells and mega cells of an integrated circuit to estimate total power consumed by the integrated circuit, the programmed computer programmed with code comprising:

code for simulating logic of said basic cells and said mega cells, wherein each function of each mega cell for logic simulation is defined by hardware description language;

code for estimating a current consumed by the basic cells for estimating a first value of electric power consumed by said basic cells based on logic simulation results

from said logic simulations and pre-established power consumption data for each logic state of each input and output terminal of said basic cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a second value of electric power consumed by said mega cells based on logic simulation results from said logic simulations and pre-established power consumption data for said logic states, variables in the function description, and said operating frequencies at each input and output terminal of each mega cell; and

code for adding said first and said second values of the power consumption to determine the total power consumption for the integrated circuit.

39. A programmed computer for estimating power consumption of an integrated circuit, the programmed computer programmed with code comprising:

code for compiling a table which tabulates data of electric power consumed by mega cells of the integrated circuit during operation;

code for simulating logic of said mega cells and basic cells of the integrated circuit, wherein data from said table is used when simulating logic of said mega cells;

code for estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a

first value of electric power consumed by said mega cells based on results from said logic simulations;

code for estimating a current consumed by the basic cells for estimating a second value of electric power consumed by said basic cells based on logic simulation results from said simulations and pre-established power consumption data for each logic state at each input and output terminal of said basic cells; and

code for adding said first and said second values to obtain the power consumption of the integrated circuit.

ABSTRACT OF THE DISCLOSURE

A computer readable medium includes computer executable code stored thereon, the code for estimating power consumption of an integrated circuit, comprising code for simulating logic of basic and mega cells of the integrated circuit, code for
5 estimating a current consumed by the mega cells by obtaining logic states for each mega cell, determining an average operation frequency for each logic state, and determining an alternating current component and a direct current component for each logic state to calculate said current consumed by the mega cells for estimating a first value of electric power consumed by said mega cells based on said logic simulations and pre-established power consumption data, code for estimating a current consumed by the basic cells for
10 estimating a second value of electric power consumed by said basic cells based on said logic simulations and pre-established power consumption data and code for combining said first and second values to obtain the power consumption of the integrated circuit.

FIG. 1

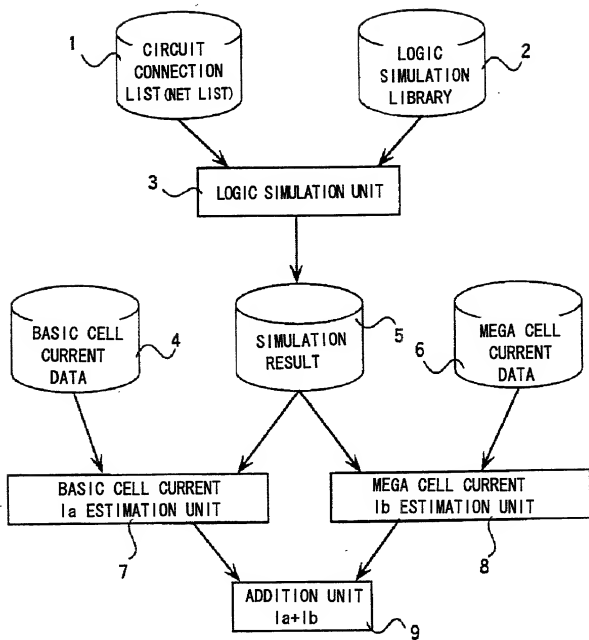


FIG. 2

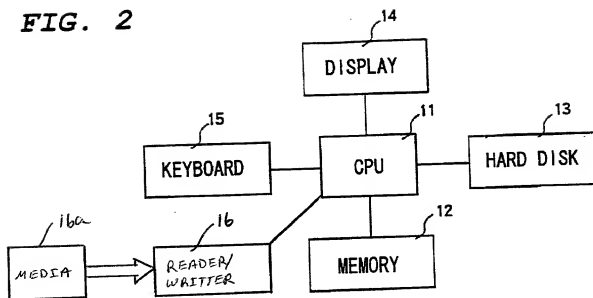


FIG. 3

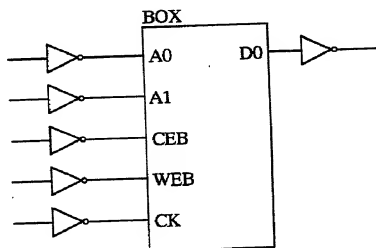


FIG. 4

CELL NAME	RAM
CELL TYPE	SYNCHRONOUS
FREQUENCY SIGNAL	CK
STATE LIST	standby, read, write

FIG. 5

STATE	STATE DEFINING CONDITION	AC CURRENT	DC CURRENT
standby	CEB=1	0	S
read	WEB=1 && CEB=0	$X \times f$	D0-Z(1)
write	WEB=0 && CEB=0	$Y \times f$	0

FIG. 6

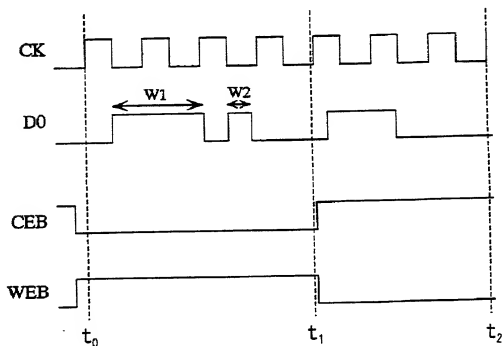


FIG. 7

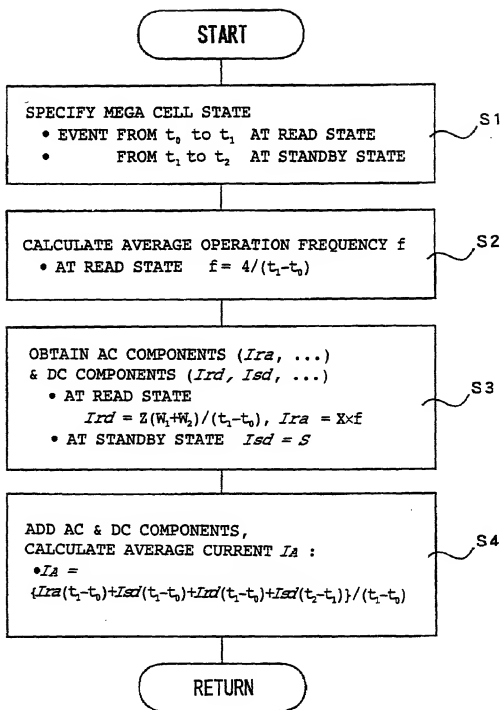


FIG. 8

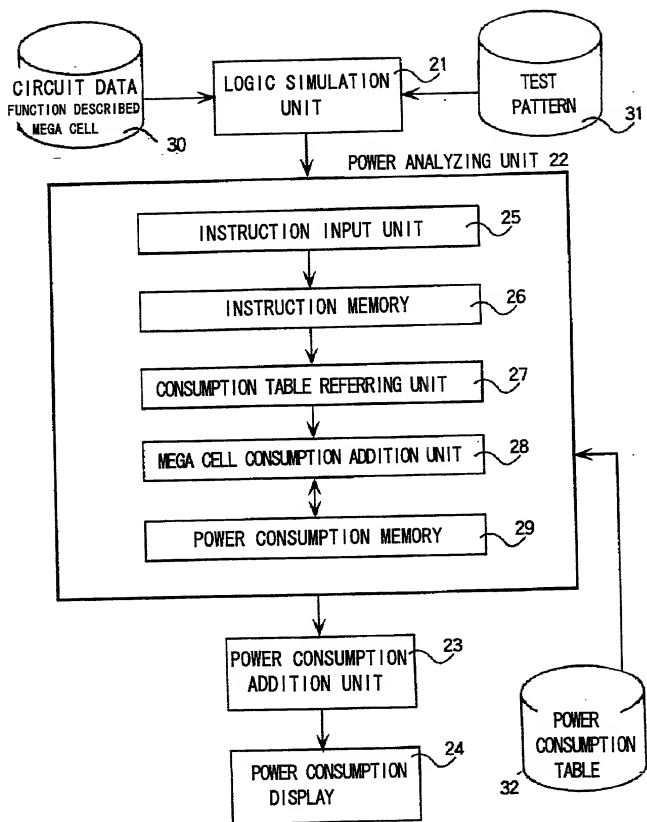


FIG. 9

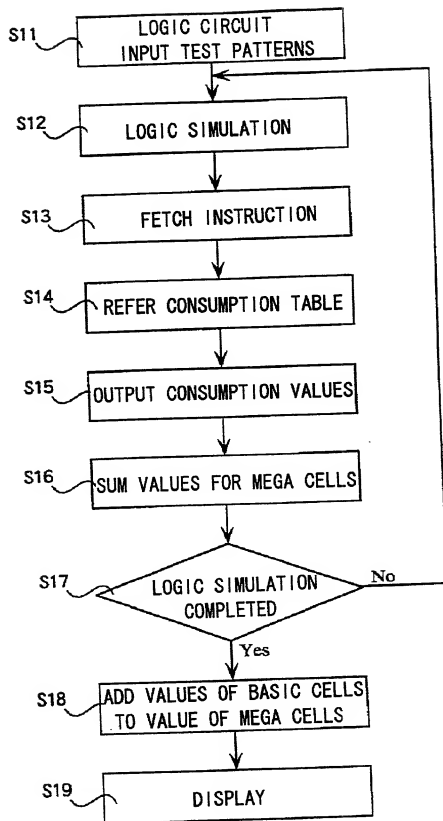


FIG. 11

```

      .
always begin
      .
      Inst_LDA;
      .
      Inst_STA;
      .
end
      .
task Inst_LDA;
  begin
      .
      $PowerAnalysis("LDA");
      end
  endtask
      .
task Inst_STA;
  begin
      .
      $PowerAnalysis("STA");
      end
  endtask
      .

```